

CEMB[®] USA



Exclusive design saves time and provides a superior balance by eliminating the removal of wheel bearings and ensuring the wheel is centered on the motorcycle. This saves time in set up by not removing the bearings from the wheels, eliminates setup parts on the balancer and provides a more accurate balance. Handles multiple applications including scooters, single swing arm wheels and super-wide Harley wheels.

K22

LED Screen

Static/Dynamic Modes

2D Automatic Gauge

Ergonomic Design

Exclusive Design

Manual Locking

Fixed Shaft

Multiple Applications



Standard Accessories



Motorcycle Shaft Kit
460013271




+10 mm Extension
940052576



Rim Width Gauge
46FC77653

DIMENSIONS

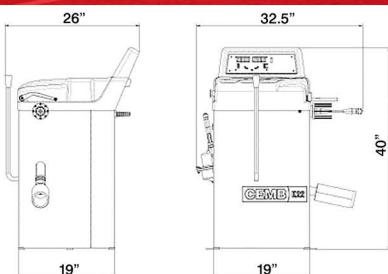

Power Supply: 110V, 1ph
Wheel Clamping Type: Manual
Max. Rim Diameter: 30" (765 mm)
Max. Rim Width: 20" (510 mm)
Max. Tire Diameter: 28" (711 mm)
Shipping Weight: 220 lbs. (100 kg)

CONTACT

CEMB[®] USA

CEMB USA - BL Systems Inc.
 2873 Ramsey Road, Gainesville, GA 30501
 (678) 717-1050 - sales@cemb-usa.com
 www.cemb-usa.com